


VDG BELT CLEANER



The VDG Belt Cleaner is an innovative solution for cleaning residual materials and removing excessive carryback of wet and dry fines clinging to conveyor belts. Engineered to operate in the harshest of conditions, the Belt Cleaner has a 10-inch diameter replaceable rotating spiral brush mounted on an internally powered VDG Drum Motor with a service life of 80,000 hours before maintenance and a long brush life.

The robust VDG Belt Cleaner is a compact, low profile design and easily installs under the conveyor belt with the adjustable mounting brackets. It effectively cleans conveyor belts including belts with cleats, lacing, repair patches, and sidewalls without wearing or damaging the belt, increasing the life of the belt and reducing operating costs.

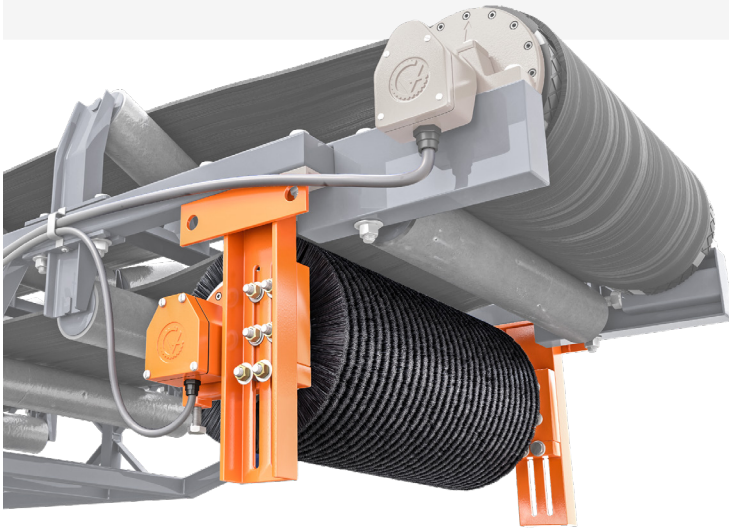

- Completely sealed drum motor with easily replaceable spiral brush
- Removes excessive carryback with no belt wear
- Ideal for use on chevron or cleated belts
- Maintenance-free drum motor up to 80,000 hours of operations
- Excels in the most challenging environments

Made in USA 




1-888-326-1476 | info@vandergraaf.com | www.vandergraaf.com

500-02 v8 (09/2021) © 2021 Van der Graaf Inc. All Rights Reserved.



VDG BELT CLEANER

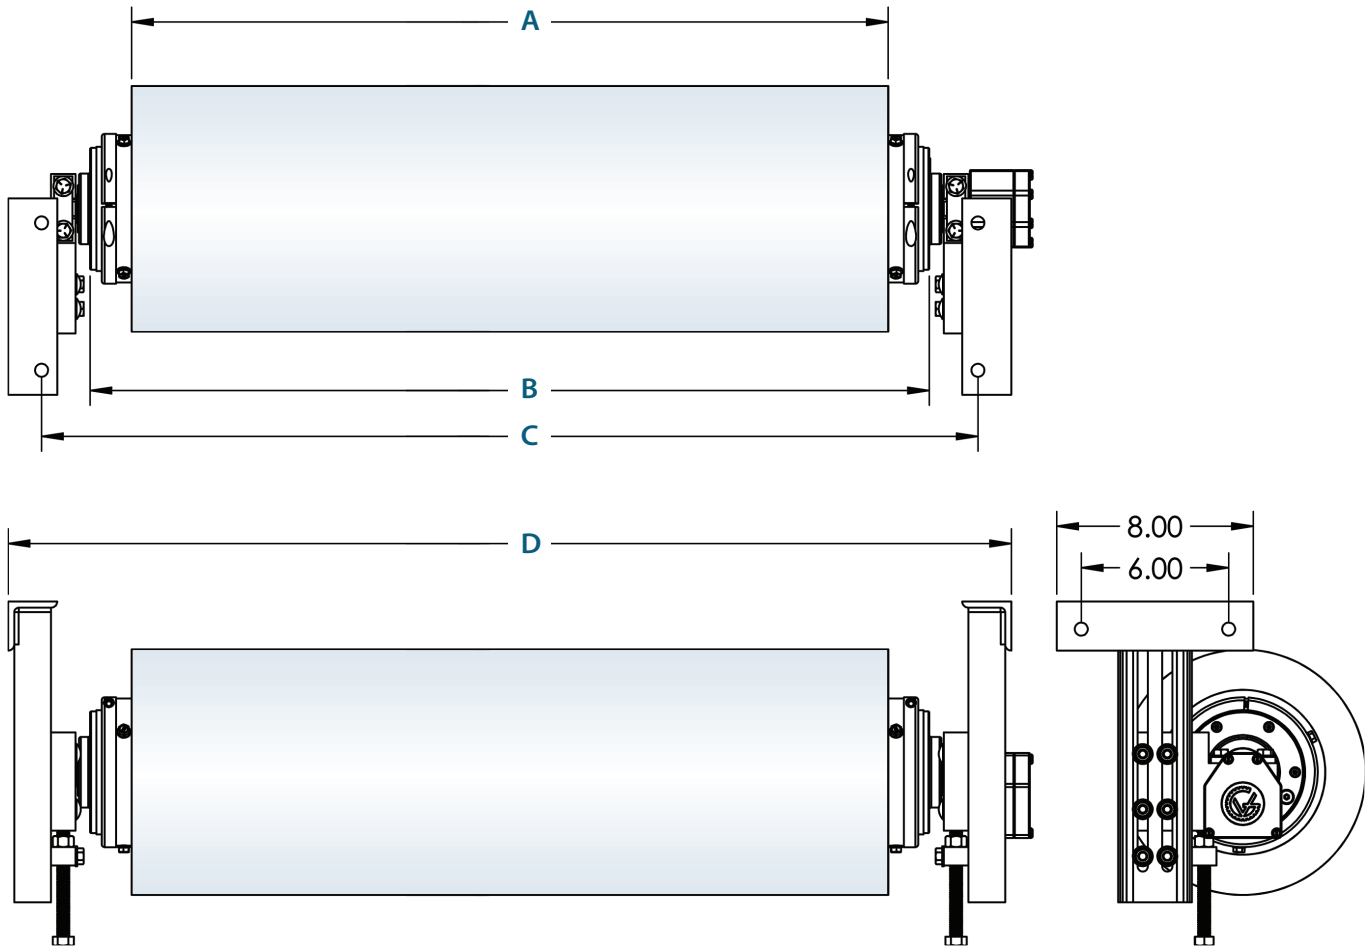

	A	A	B	B	C	D			
Belt Width (inches)	Brush Width (inches)	Brush Density (# of Turns)	Face Width (mm)	Face Width (inches)	Bracket Centers (inches)	Bracket Outside (inches)	Motor (HP)	Speed Range (fpm)	Brush Motor (code)
24	26	42	750	29.53	33.5	36.2	1.0	164 - 630	BM127A25-SB24
30	32	51	900	35.43	39.4	42.1	1.0	164 - 630	BM127A25-SB30
36	38	61	1050	41.34	45.3	48.0	1.0	164 - 630	BM127A25-SB36
42	44	71	1200	47.24	51.2	53.9	1.0	164 - 630	BM127A25-SB42
48	50	80	1350	53.15	57.1	59.8	1.0	236 - 614	BM127A25-SB48
54	56	90	1500	59.06	63.0	65.7	1.0	236 - 614	BM127A25-SB54
60	62	99	1650	64.96	68.9	71.6	1.0	236 - 614	BM127A25-SB60
72	74	119	2000	78.74	82.7	85.4	1.0	236 - 614	BM127A25-SB72

Shown with standard CEMA frame and belt width.

DRUM MOTOR AND BRUSH SPECIFICATIONS:

- 3 Phase 60 Hz, available in 230, 480, 575 Voltage
- CSA and UL Certified for operation in hazardous locations Class II, Group E, F & G. IP66 & 68 rated.
- Nylon 66 Continuous Spiral Brush, OD 10" standard.