


# VDG BELT CLEANER

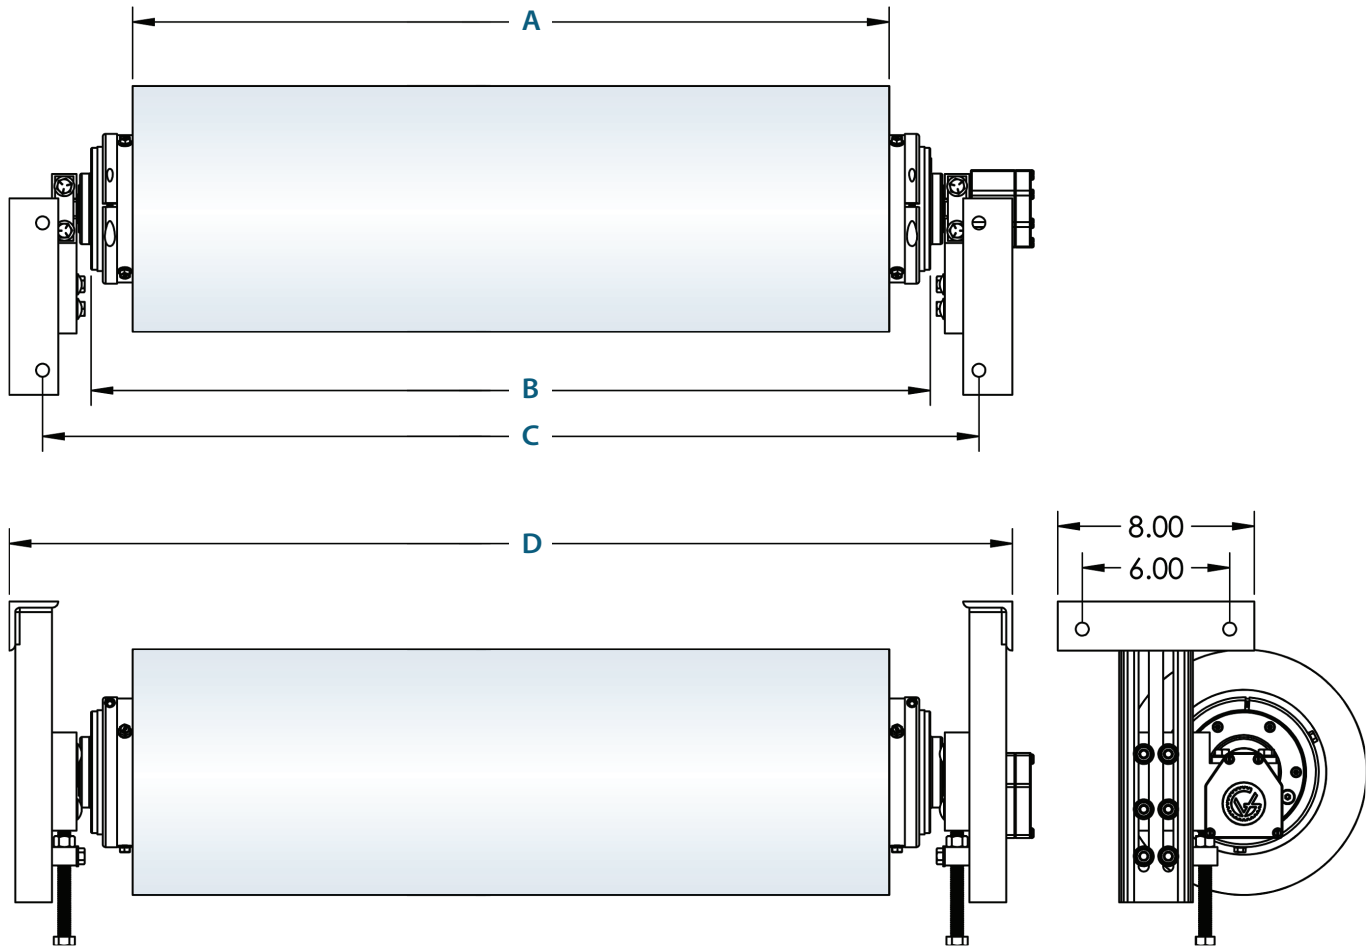

	A	A	B	B	C	D			
Belt Width (inches)	Brush Width (inches)	Brush Density (# of Turns)	Face Width (mm)	Face Width (inches)	Bracket Centers (inches)	Bracket Outside (inches)	Motor (HP)	Speed Range (fpm)	Brush Motor (code)
24	26	42	750	29.53	33.5	36.2	1.0	164 - 630	BM127A25-SB24
30	32	51	900	35.43	39.4	42.1	1.0	164 - 630	BM127A25-SB30
36	38	61	1050	41.34	45.3	48.0	1.0	164 - 630	BM127A25-SB36
42	44	71	1200	47.24	51.2	53.9	1.0	164 - 630	BM127A25-SB42
48	50	80	1350	53.15	57.1	59.8	1.0	236 - 614	BM127A25-SB48
54	56	90	1500	59.06	63.0	65.7	1.0	236 - 614	BM127A25-SB54
60	62	99	1650	64.96	68.9	71.6	1.0	236 - 614	BM127A25-SB60
72	74	119	2000	78.74	82.7	85.4	1.0	236 - 614	BM127A25-SB72

Shown with standard CEMA frame and belt width.

## DRUM MOTOR AND BRUSH SPECIFICATIONS:

- 3 Phase 60 Hz, available in 230, 480, 575 Voltage
- CSA and UL Certified for operation in hazardous locations Class II, Group E, F & G. IP66 & 68 rated.
- Nylon 66 Continuous Spiral Brush, OD 10" standard.